

ELARI®

KidPhone

**ЖУ, ПУГОДИ!**

EN



User manual

## Contents

<b>I.</b>	Introduction.....	3
<b>II.</b>	SIM card installation.....	5
<b>III.</b>	Application installation.....	7
<b>IV.</b>	Pairing to smartphone.....	9
<b>V.</b>	Application description.....	11
<b>VI.</b>	Warnings.....	16
<b>VII.</b>	Main functions.....	18
<b>VIII.</b>	FAQ.....	30
<b>IX.</b>	Storage and transportation.....	34
<b>X.</b>	Rules of disposal.....	34
<b>XI.</b>	Lifetime.....	35
<b>XII.</b>	Manufacturing date.....	35
<b>XIII.</b>	Technical specifications.....	36

## I. Introduction

### 1. Product description:

KidPhone Well, Just You Wait! – 2G kids smartwatch-phone with GPS/A-GPS/LBS/Wi-Fi/GLONASS-tracking, voice calling capability and a SOS button. KidPhone Fresh is designed to track your child's location as well as receive and return calls and messages.


### Package contents:




KidPhone  
Well, Just You Wait!



USB charging  
cable



User manual



Warranty card



## 2. About the product:

1. Charging port
2. SIM card slot
3. Short press: swipe right  
Long press: SOS signal
4. Short press from menu: return to home screen  
Short press from home screen: turn the backlight On/Off  
Long press: Turn the device On/Off
5. Short press: swipe left
6. Back

## II. SIM card installation

**Warning:** Make sure that your SIM card can connect to Internet, receive SMS messages and calls. ELARI Well, Just You Wait! work via 2G cellular connection: make sure that your carrier supports GSM 900/1800 network bands. If your SIM card requires a PIN code input, this feature should be deactivated before installing the SIM card into KidPhone Well, Just You Wait!

1. Turn the device off before installing the SIM card to the device. Place the SIM-card chip side facing the screen and cut corner's side facing the device. Ensure you hear the click after install.



2. Turn the device on after installing the SIM card or restart it if the device was on during installation.

### III. Application installation

#### Application download

Find and install ELARI SafeFamily (free) in Google Play or App Store. Or just scan the QR code for the Google Play or App Store link.



## Registration process

- Open the ELARI SafeFamily app and click "Register".
- Input nickname and your email address.
- Input your mobile phone number. Example: +X (country code) XX (operator code) XXXXXXX (subscriber number)
- Get registration code from email and input this code.
- Create password and repeat it.

The screenshot shows the registration interface of the ELARI SafeFamily app. It features a blue header with a back arrow and the title "Register". The form includes the following fields and elements:

- Nickname
- Input email address
- Verification code (with a blue "Get code" button)
- Mobile phone number
- Password
- Repeat password
- A large blue "Register" button
- A disclaimer: "By clicking on the Register, you agree to our ELARI SafeFamily Terms and that you have read our policy"
- A blue link for "Terms and Privacy"

## IV. Pairing to smartphone


1. Install the SIM card into KidPhone Well, Just You Wait! (for further instructions check II).
2. Register in ELARI SafeFamily app (for further instructions check III).
3. Connect KidPhone Well, Just You Wait! to admin profile

Scroll the menu to "Settings" and select "Pairing Code", after that you can scan the QR code using the ELARI SafeFamily app and pair the watch to your smartphone.



**Warning:** the first user to scan the QR code is granted admin status. Other users can scan the QR code in the admin's app or the admin can add further users manually.  
Smartwatch profile editing: input the smartwatch's phone number, name of the child, a photo etc.

**Warning:** make sure to input the correct phone number including the country code.  
When the pairing process finishes, the application will show the live location of the smartwatch on the map.

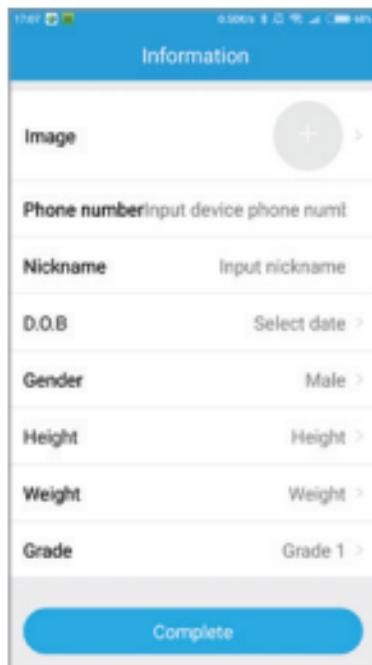

The screenshot shows a mobile application interface with a blue header titled "Information". Below the header is a list of form fields, each with a label and a value or a selection option, followed by a right-pointing chevron. The fields are: "Image" with a plus sign icon; "Phone number" with the placeholder text "input device phone num"; "Nickname" with the placeholder text "input nickname"; "D.O.B" with the selection option "Select date"; "Gender" with the selection option "Male"; "Height" with the selection option "Height"; "Weight" with the selection option "Weight"; and "Grade" with the selection option "Grade 1". At the bottom of the form is a blue button with the text "Complete".


Image	+ >
Phone number	input device phone num >
Nickname	input nickname >
D.O.B	Select date >
Gender	Male >
Height	Height >
Weight	Weight >
Grade	Grade 1 >

Complete

## V. Application description

### Home screen


- Battery level indicator.
- Call button: press to make a call to the smartwatch.
- Contacts: edit the list of contacts and family members, who can monitor the device.
- Application notifications.
- Change the device.
- Manual location request: press to manually request the live smartwatch location.

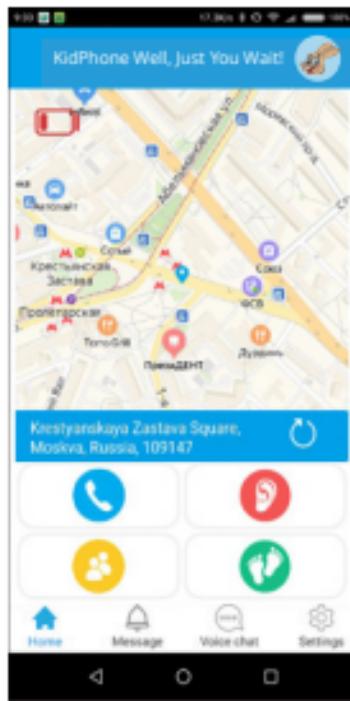

- Audio monitoring: select to make the smartwatch call a mobile number. Any sounds or notifications on the smartwatch's screen will be disabled.
- Pedometer: select to view the number of steps made by the child.


## Voice chat

- Voice message button: hold the button to record the voice message, let go to send. Maximum duration of the voice message is 15 seconds.
- Call button: press to make a call to the smartwatch.
- Emoji: press the button and choose the emoji that will be sent to the smartwatch.
- Voice messages: short press to listen to a message.

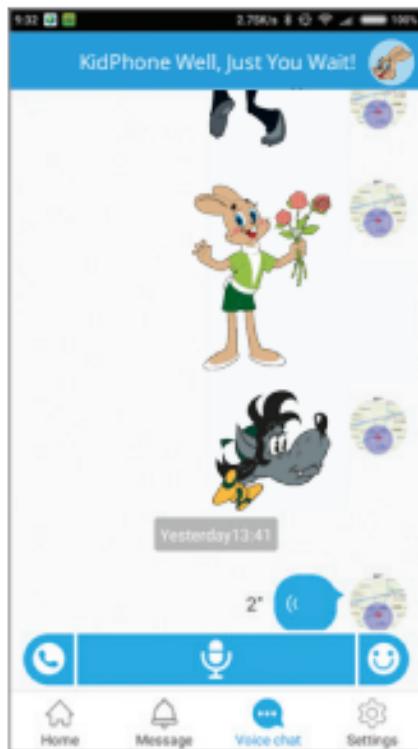

## Settings

- System and profile settings
- Set the device info
- Set the Geofence, view the location history, set the alarms, friend list management, set the "Study" mode, set the smartwatch volume
- Tracker info: you can view IMEI code of the device, QR code and unpair the smartwatch from the app
- Tracker settings
- Add tracker

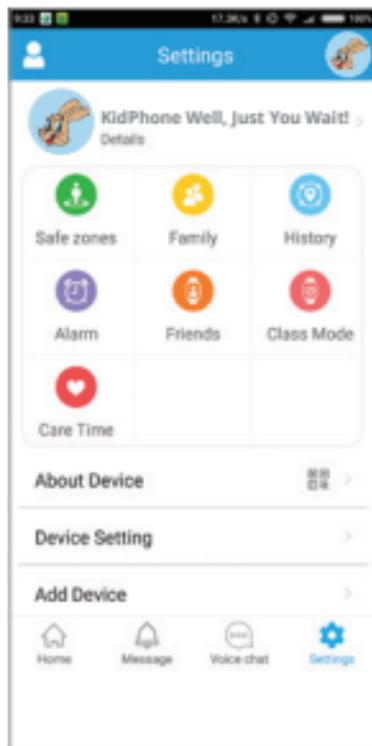

## Pairing the smartwatch to the app

Select the "Pairing code" option from the menu. You will be able to scan the QR code with the ELARI SafeFamily app and pair the smartwatch to the smartphone.



## VI. Warnings

1. Do not submerge the device in water.
2. Keep away from fire and high temperatures.
3. Do not let small children and pets to play with KidPhone Well, Just You Wait! The device contains small parts, which can cause harm.
4. Only use the included charging cable to charge the device.
5. The device will not work if turned off or if the cellular connection is lost.
6. Charger output must be: 5V 1A.
7. Do not drop, hit or shake the device. Careless handling can lead to damage of the integrated board and mechanical parts.

8. Make sure to input the correct phone number including the country code. For example: + (country code) xxxxxxxxxx. Do not use symbols such as '(', ')', '-', ''.
9. KidPhone Well, Just You Wait! works on 2G networks. Photo sharing function, calls and automatic updates can consume a large amount of data. Choose the appropriate carrier plan and set the Wi-Fi passwords for frequently visited places.

## VII. Main functions

### Shutdown and reboot

Scroll through the screen to enter the "Settings" mode, and select "Shutdown" from the list.



## Incoming and outgoing calls

Press the up or down button, or navigate the menu until you reach "Contacts". Choose one contact to make a call. Click the power button to end the call. You can add up to 100 contacts.



## Voice chat

Press the up or down button, or navigate the menu until you reach "Voice chat". Choose any contact and record the voice message by holding 'Microphone' button. KidPhone Well, Just You Wait! can receive voice messages and emojis from ELARI SafeFamily app, as well as send voice messages and emojis to the app.



## “Find friends”

This function requires more than one ELARI smartwatch of the same model to be present. Press the up or down button or use the screen to navigate the screen to “Find friends” option from the list. Press the “Find friends” button on two smartwatches at the same time and position them next to each other. Wait until smartwatches send and receive the request. You can view the friends list in ELARI SafeFamily app.



## Pedometer

Navigate the screen to select the "Pedometer". Daily activity monitoring based on the number of steps.

**Warning:** Input the correct weight, height and DOB info to accurately calculate the number of calories burned.



## SOS

Press and hold the button for 3 seconds, to activate the SOS signal. All family members will receive the SOS notification, smartwatch location coordinates, as well as a sound recording of the last 15 seconds prior to SOS signal activation.



## VIII. FAQ

Q: What sort of SIM card is required?

A: KidPhone Well, Just You Wait! works with nanoSIM cards that support 2G networks (900/1800)

Q: How long does the battery last in standby mode?

A: KidPhone Well, Just You Wait! battery capacity is 450mAh. Actual working time varies based on the smartwatch's settings and the frequency of the location updates. KidPhone Well, Just You Wait! is rated for up to 72 working hours in standby mode.

Q: Are there any age requirements to use the KidPhone Well, Just You Wait!?

A: There are no age requirements, but the device is best suited to children between 3 to 12 years old.

Q: Are the materials that KidPhone Well, Just You Wait! made from safe?

A: All the materials used in the KidPhone Well, Just You Wait! production comply with European standards.

Q: How should the smartwatch be cleaned?

A: Wipe the smartwatch with a wet cloth, add a bit of alcohol to clean any difficult to remove marks.

Q: Can KidPhone Well, Just You Wait! harm my child's health with radiation?

A: The KidPhone Well, Just You Wait! cell module's radiation level is much lower than the limit set by the European standard.

Q: Is KidPhone Well, Just You Wait! waterproof?

A: KidPhone Well, Just You Wait! is protected from drips of water, but must not be immersed into water.

Q: The smartwatch is warming up during charging, is this normal?

A: Yes, it is for this model.

Q: What should I do if the QR code scan fails?

A: Repeat the scan in better lighting conditions, adjust the focus of your smartphone's camera to correctly focus on the QR code. Alternatively, you can input the binding number manually. Also, check the availability of Internet traffic and the ability of the SIM card to work in 2G networks.

Q: Is connection to the Internet required for the geo-positioning function to work?

A: Connection to the Internet is required to send location data. heating, poking and hitting. However, you should not carry out any tests yourself.

Q: How accurately does the geo-positioning function work?

A: ELARI KidPhone Well, Just You Wait! can figure out the location from two sources: GPS/GLONASS and LBS. GPS/GLONASS mode has high accuracy. However, buildings, metal structures, leaves on trees and other obstacles can disrupt the signal. This is not because of the specific device's flaw, but the technical characteristic of GPS/GLONASS. If the GPS/GLONASS signal is weak or non-existent, ELARI KidPhone Well, Just You Wait! will use LBS to acquire location data.

Q: Can the smartwatch's battery explode when exposed to high temperature or during charging?

A: KidPhone Well, Just You Wait! is equipped with a safe and reliable helium polymer lithium ion battery, which is safer than the standard lithium battery used in many modern mobile devices. The helium polymer lithium ion battery uses special colloidal electrolyte, which does not emit gas even if the liquid part of the battery is boiling, granting safety and eliminating the risk of an explosion. This type of battery has shown impressive results in all kinds of safety tests, including the heating, poking and hitting. However, you should not carry out any tests yourself.

## **IX. Storage and transportation**

The device should be stored in dry, ventilated storage spaces with the temperature ranging from  $-30^{\circ}\text{C}$  to  $50^{\circ}\text{C}$  and humidity from 15 to 85 % (without condensation). Whilst storing and transporting, the handling instructions printed on the box should be followed. When transporting, knocks and movement of the package should be avoided.

## **X. Rules of disposal**

After the end of its lifetime, the device should be utilized according to norms, rules and ways that are established in the place of utilization. The accurate information regarding utilization can be found from the appropriate government sources, according to the country of your residence. Manufacturer and authorized person of the manufacturer relieve themselves of responsibility from the possible harm caused by the incorrect usage of the device or not following the operating rules, setting up the device, intentional or careless actions, as well as any events related to weather or man-made force majeure circumstances.

## XI. Lifetime

Warranty: 1 year

Lifetime: 2 years

## XII. Manufacturing date

Date of manufacturing is printed on the box

## XIII. Technical specifications

Model.....	KP-NP
Geolocation.....	Wi-Fi/ГЛОНАСС/GPS/A-GPS/LBS
SIM card type..	nanoSIM
Display.....	1.4 "

The manufacturer holds the right to change the construction, included accessories and contents of the box, or the manufacturing technique without any notice in order to improve any properties of the device, given that this does not void any quality standards and laws of the country of manufacturing/transit/sale.

Made in China



[www.elari.net](http://www.elari.net)



ELARI®  
KidPhone

RU

**ЖУ, ПГОДИ!**



Краткое руководство  
пользователя

## Содержание

I.	Знакомство с продуктом .....	41
II.	Установка SIM-карты .....	43
III.	Установка приложения.....	45
IV.	Подключение к смартфону.....	47
V.	Описание приложения.....	49
VI.	Предупреждения .....	54
VII.	Основные функции.....	56
VIII.	FAQ .....	68
IX.	Транспортировка и хранение .....	72
X.	Правила утилизации.....	72
XI.	Срок эксплуатации .....	73
XII.	Дата изготовления .....	73
XIII.	Технические характеристики .....	74

## I. Знакомство с продуктом

### 1. Описание продукта:

KidPhone Ну, погоди! – детские 2G часы-телефон с Wi-Fi/ GPS/A-GPS/LBS-трекингом, голосовыми вызовами и кнопкой SOS, предназначенные для отслеживания месторасположения ребёнка и обмена с ним звонками и голосовыми сообщениями.

### Содержимое упаковки:




KidPhone  
Ну, погоди!



USB-кабель  
питания



Краткое  
руководство  
пользователя



Гарантийный  
талон



1. Порт для зарядки
2. Слот для microSIM-карты
3. **Короткое нажатие:**  
Листать вправо  
**Долгое нажатие:**  
Сигнал SOS
4. **Короткое нажатие из меню:**  
Возврат на начальный экран  
**Короткое нажатие на начальном экране:**  
Вкл./Выкл. подсветку  
**Долгое нажатие:**  
Вкл./Выкл. часы
5. **Короткое нажатие:**  
Листать влево
6. Назад

## I. Подготовка к работе

### 1. Установка SIM-карты

1) Убедитесь, что SIM-карта поддерживает доступ в Интернет, прием SMS-сообщений и голосовые звонки. ELARI KidPhone Ну, погоди! рассчитаны на работу в сетях 2G: убедитесь, что выбранный оператор поддерживает работу в сетях GSM 900/1800. Перед тем как вставить SIM-карту в часы, отключите запрос PIN-кода (если необходимо) на SIM-карте с помощью вашего телефона.

2) Выключите часы перед установкой SIM-карты. Расположите SIM-карту чипом вверх к экрану и срезанным углом внутрь часов и установите карту до щелчка.



Включите часы после того как вставили SIM-карту или перезапустите их, если они были включены.

### III. Установка приложения

#### Скачивание приложения

Найдите и установите бесплатное приложение ELARI SafeFamily в Google Play или App Store.

Или отсканируйте QR-код для удобного перехода на Google Play или App Store.



## Последовательность регистрации

- Войдите в приложение ELARI SafeFamily и выберите «Регистрация».
- Введите Имя и адрес вашей электронной почты
- Введите номер вашего мобильного телефона (обязательно вносите номер телефона в международном формате +79XXXXXXXXX). Пример для России: +7 (код страны) 987 (код оператора) 1234567 (номер абонента) все вместе +79871234567 (без скобок, тире и других знаков кроме знака «+» в начале номера, знак «+» ставится долгим нажатием на 0).
- Введите регистрационный код, высланный на указанный адрес электронной почты.
- Придумайте пароль и повторите его.

10:28 3.219 МБ 8 9 79%

← Регистрация

Шаг 1: Ваше имя

Шаг 2: Введите email

Шаг 3: Введите ВАШ номер телефона

Шаг 4: Проверочный к... **Получить**

Шаг 5: Придумайте пароль

Шаг 6: Повторите пароль

**Регистрация**

Нажимая на Регистрация, Вы принимаете пользовательское соглашение

## IV. Подключение к смартфону

1. Вставьте SIM-карту в KidPhone Ну, погоди! (подробнее см. II).
2. Зарегистрируйтесь в приложении ELARI SafeFamily (подробнее см. III).
3. Подключите часы KidPhone Ну, погоди! к профилю Администратора

Пролистайте меню до “Установки” и выберите «Код привязки», после чего вы сможете отсканировать QR-код с помощью приложения ELARI SafeFamily и привязать часы к вашему смартфону.



**Примечание:** пользователь, который отсканирует QR-код первым, становится администратором часов. Другие пользователи могут отсканировать QR-код в приложении Администратора, или он может добавить их самостоятельно в роли наблюдателей.

г) Заполнение профиля часов: добавьте номер телефона часов, имя ребёнка, изображение и т. д.

**Примечание:** обязательно введите правильный номер телефона с указанием кода страны.

д) Когда подключение завершено, приложение отобразит местоположение часов в режиме реального времени на карте.


Информация	
Картинка	
Телефон	Телефон
Имя ребенка	Введите имя
Дата рождения	Укажите ДР
Пол	Муж.
Рост	Укажите рост ребенка
Вес	Укажите вес ребенка
Класс	Первый класс

Готово

## V. Описание приложения

### Домашний экран


- Уровень заряда батареи
- Кнопка вызова: нажмите, чтобы позвонить на часы
- Контакты: настраивайте список контактов и членов семьи, которые могут следить за устройством
- Уведомления приложения
- Сменить устройство
- Запрос координат вручную: нажмите на карту, чтобы запросить текущее местоположение часов

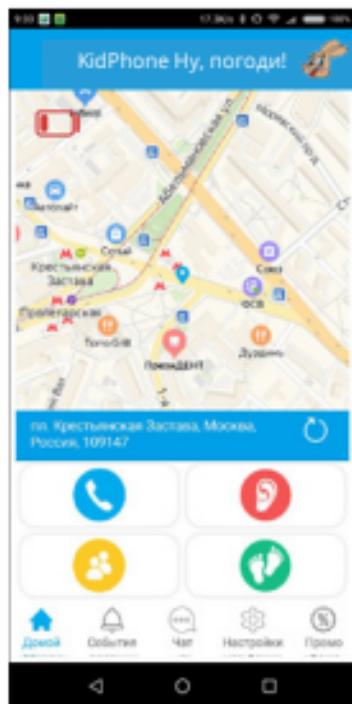

- Аудиомониторинг: нажмите, чтобы отправить на часы команду перезвонить на ваш номер. Звуковая индикация и уведомления на экране часов при этом будут отключены
- Шагомер: выберите, чтобы посмотреть количество шагов, пройденных ребёнком


## Голосовой чат

- Кнопка голосового сообщения: удерживайте кнопку для записи голосового сообщения, отпустите для отправки записи. Максимальная длительность одной записи: 15 секунд
- Кнопка вызова: нажмите, чтобы позвонить на часы
- Эмоджи: нажмите кнопку и выберите эмоджи, который будет отправлен на часы
- Голосовые сообщения: короткое нажатие для прослушивания записи

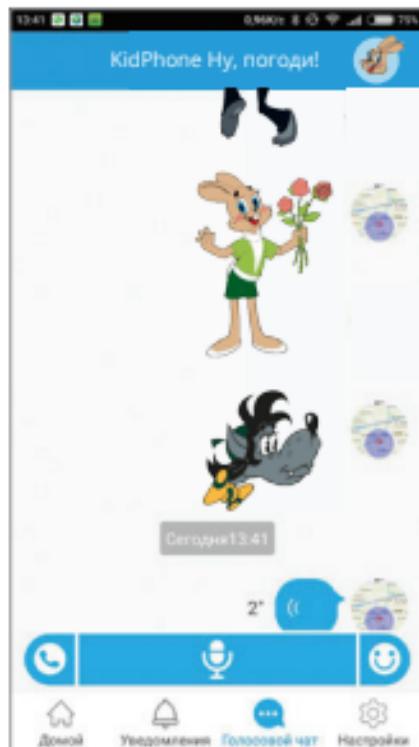

## Настройки

- Настройки системы и профиля пользователя
- Настроить информацию об устройстве
- Настроить Геозоны, посмотреть историю местоположения, настроить будильники, управление списком Друзей, настроить режим На занятиях, настроить Геолокацию, настроить громкость часов
- Данные трекера: вы можете посмотреть IMEI устройства QR-код, а также отвязать часы от приложения
- Настройки трекера
- Добавить трекер
- Моя информация

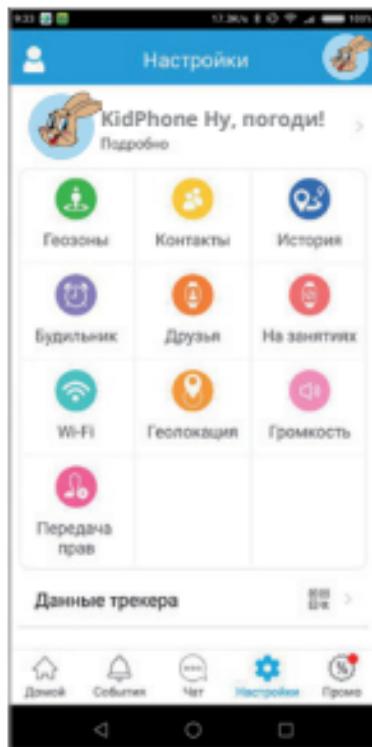

## Привязка часов к мобильному приложению

Листайте экран, чтобы войти в «Установки», выберите «Код привязки», после чего вы сможете отсканировать QR-код с помощью приложения ELARI SafeFamily и привязать часы к вашему смартфону.



## VI. Предупреждения

1. Не позволяйте маленьким детям или животным играть с KidPhone Fresh. Продукт содержит мелкие детали, которые могут представлять опасность.
2. KidPhone Fresh являются водостойкими. Устройство защищено от брызг, дождя, пота, однако часы следует снять перед плаванием или душем.
3. Нахождение часов в помещении, влияние атмосферы и другие источники помех могут снижать точность позиционирования по GPS.
4. Не подвергайте устройство воздействию высокой температуры.
5. Не допускайте попадание пыли или грязи в устройство.

6. Не роняйте и не бейте, не трясите устройство. Неосторожное обращение может привести к нарушению целостности печатной платы или механических элементов.
7. Ток заряда должен составлять: 5В 1А (стандартное зарядное USB-устройство).
8. Убедитесь, что вы правильно ввели номер телефона, используя код страны. Например + 7xxxxxxx. Не используйте символы типа '(, ')', '- ', ''.
9. KidPhone Fresh работают в сети 2G. Функции обмена фотографиями, звонка и автоматического обновления прошивки часов могут потреблять значительное количество интернет-трафика. Выберите тариф оператора и установите пароли сетей Wi-Fi для часто посещаемых мест.

## VII. Основные функции

### Выключение и перезагрузка

Долгое нажатие кнопки выкл/вкл (5) позволяет выключить и включить часы.



## Звонки

Нажмите верхнюю или нижнюю клавиши либо пролистайте меню на экране до раздела «Контакты». Листайте список контактов и выберите нужный, чтобы начать звонок. Для завершения вызова нажмите кнопку на экране. Максимальное количество номеров, которое может быть добавлено – 100.



## Голосовые сообщения

Нажмите верхнюю или нижнюю клавиши либо пролистайте меню и выберите «Голосовой чат». Выберите контакт и длительным нажатием на пиктограмму «Микрофон» запишите голосовое сообщение. Часы могут получать голосовые сообщения и эмоджи из приложения Elari SafeFamily.



### III. FAQ

**В:** Какая SIM-карта подходит для Elari KidPhone Ну, погоди?

**О:** Elari KidPhone Ну, погоди! необходима microSIM-карта с поддержкой работы в сетях GSM 900/1800.

**В:** Какое время работы в режиме ожидания Elari KidPhone Ну, погоди!?

**О:** Ёмкость батареи Elari KidPhone Ну, погоди! составляет 450 мАч. Время работы в режиме ожидания зависит от настроек часов и частоты обновления координат. Среднее время работы в режиме ожидания составляет до 72 часов.

**В:** Есть ли у часов возрастные ограничения?

**О:** Возрастных ограничений нет, но часы предназначены в первую очередь для детей от 3 до 12 лет.

**В:** Безопасен ли материал, из которого сделаны Elari KidPhone Ну, погоди!?

**О:** Все материалы, используемые в Elari KidPhone Ну, погоди!, соответствуют европейским стандартам качества.

**В:** Как ухаживать за часами?

**О:** Протирайте часы влажной салфеткой, при серьезных загрязнениях – с добавлением спирта.

**В:** Влияет ли излучение радиомодуля Elari KidPhone Ну, погоди! на здоровье детей?

**О:** Излучение радиомодуля Elari KidPhone Ну, погоди! значительно ниже европейского стандарта.

**В:** Elari KidPhone Ну, погоди! водонепроницаемы?

**О:** Часы защищены от попадания брызг, но не предназначены для попадания в воду или погружения.

**В:** Мои часы нагреваются при зарядке. Это нормально?

**О:** Да, для данной модели часов это нормально.

**В:** Что делать, если возникает проблема со сканированием QR-кода?

**О:** Проверьте что SIM-карта вставлена и Elari KidPhone Ну, погоди! находятся в GPRS-соединении. Проверьте также наличие интернет трафика и способность SIM-карты работать в сети 2G. Повторите сканирование в условиях большей освещённости, выбрав оптимальный фокус при наведении камеры вашего смартфона на QR-код. Либо введите код привязки вручную.

**В:** Требуется ли сеть передачи данных для работы функции геопозиционирования?

**О:** Elari KidPhone Ну, погоди! передает данные по сотовой сети для трансляции местоположения на сервер.

**В:** Может ли батарея взорваться под воздействием высоких температур или при зарядке?

**О:** Elari KidPhone Ну, погоди! использует более надёжную и безопасную батарею в сравнении со стандартной литиевой. Гелиевый полимерный литий-ионный аккумулятор использует специальный коллоидный электролит, который не выделяет газ, даже если жидкостная составляющая батареи кипит, тем самым обеспечивая безопасность от взрыва. Данный тип батареи продемонстрировал отличные результаты в тестах на безопасность – в частности, на пробитие, нагревание и удары. Тем не менее, вы не должны проводить какие-либо тесты самостоятельно.

**В:** Насколько точно работает функция позиционирования?

**О:** Elari KidPhone Ну, погоди! могут получать местоположения по двум каналам: GPS/ГЛОНАСС и LBS. Режим GPS/ГЛОНАСС обладает хорошей точностью. Условия плотной застройки, металлические конструкции, листва и другие препятствия ухудшают прохождение сигнала. Данное ограничение не является недостатком часов, а вызвано технологическими особенностями системы GPS/ГЛОНАСС. При отсутствии GPS/ГЛОНАСС-сигнала Elari KidPhone Ну, погоди! используют LBS для определения местоположения.

## IX. Транспортировка и хранение

Продукция должна храниться в сухих, проветриваемых складских помещениях при температуре от  $-30^{\circ}\text{C}$  до  $+50^{\circ}\text{C}$  и влажности

от 15 до 85 % (без выпадения конденсата). При транспортировке и хранении должны строго соблюдаться требования манипуляционных знаков на упаковке прибора. При транспортировке должны быть исключены любые возможные удары и перемещения упаковки внутри транспортного средства.

## **Х. Правила утилизации**

По истечении срока службы прибор должен подвергаться утилизации в соответствии с нормами, правилами и способами, действующими в месте утилизации. Подробную информацию по утилизации вы можете получить у представителя местного органа власти. Изготовитель и уполномоченное лицо изготовителя снимают с себя ответственность за возможный вред, нанесенный данным прибором в случае, если это произошло в результате несоблюдения правил и условий эксплуатации, установки прибора, умышленных или неосторожных действий, а также в случаях, вызванных природными или антропогенными форс-мажорными обстоятельствами.

## **XI. Срок эксплуатации**

Гарантийный срок: 1 год

Срок эксплуатации: 2 года

## **XII. Дата изготовления**

Дата изготовления указана на упаковке

## **XIII. Технические характеристики**

Модель.....	KP-NP
Позиционирование .....	Wi-Fi/ГЛОНАСС/GPS/A-GPS/LBS
Тип SIM-карты .....	nanoSIM
Дисплей .....	1.4 "

Производитель оставляет за собой право без предварительного уведомления покупателя вносить изменения в конструкцию, комплектацию или технологию изготовления изделия с целью улучшения его свойств, что не нарушает принятые на территории страны производства/транзита/реализации стандарты качества и нормы законодательства.

**Изготовитель:** Юмеокс Инновейшнс Ко., Лтд  
Комната 08-09, Этаж 12, Киян Блд, Цинхуа Хай Тек Парк, Ксин-Донг Роуд 1, НаньШань, Шэньчжэнь, Китай.

**Импортер/Уполномоченная организация:** ООО «Древо Жизни»  
Россия, 119331, Москва, пр-т Вернадского, дом 29, этаж 22,  
помещение 1, комната 21, тел. +7 (495) 540-4266, [www.elari.net](http://www.elari.net)

**Служба техподдержки:**

[support@elari.net](mailto:support@elari.net) / [help.elari.net](http://help.elari.net) / 8 (800) 500-5600

Сделано в Китае



[www.elari.net](http://www.elari.net)

EAC

CE

